


DVS+Message Select

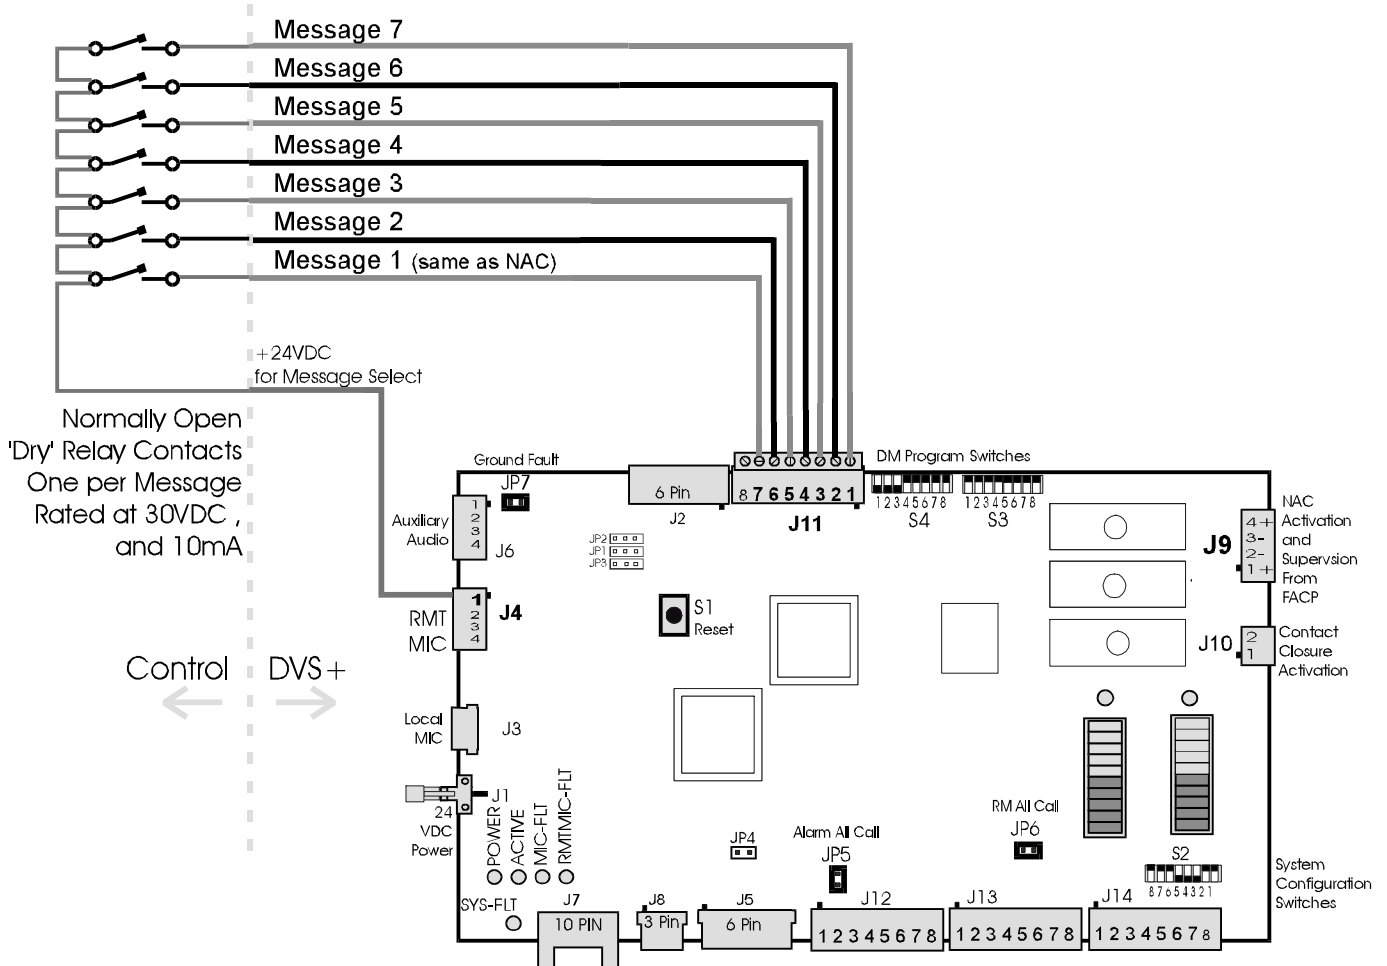

The DVS+ has up to 7 messages or tones prerecorded on the Control Module CM-1. Selection of the message is by pulling the desired message select line on J11 up to 24VDC. The 24VDC for the selection can come from J4-pin1. This is a constant source of power limited 24VDC. Tie this 24VDC from J4-1 to the commons of the switches, or dry contact relays. The Normally Open side of the dry contact is attached to the desired pin on J11.